


MAXHUB

The V6 Transcend Series Premium All-in-One Collaboration Display



Functional Integration

The V6 T Series delivers a sense of luxury with its modern workspace aesthetic and 95% screen-to-body ratio. The all-in-one display integrates camera, microphone, speaker, and touch panel.

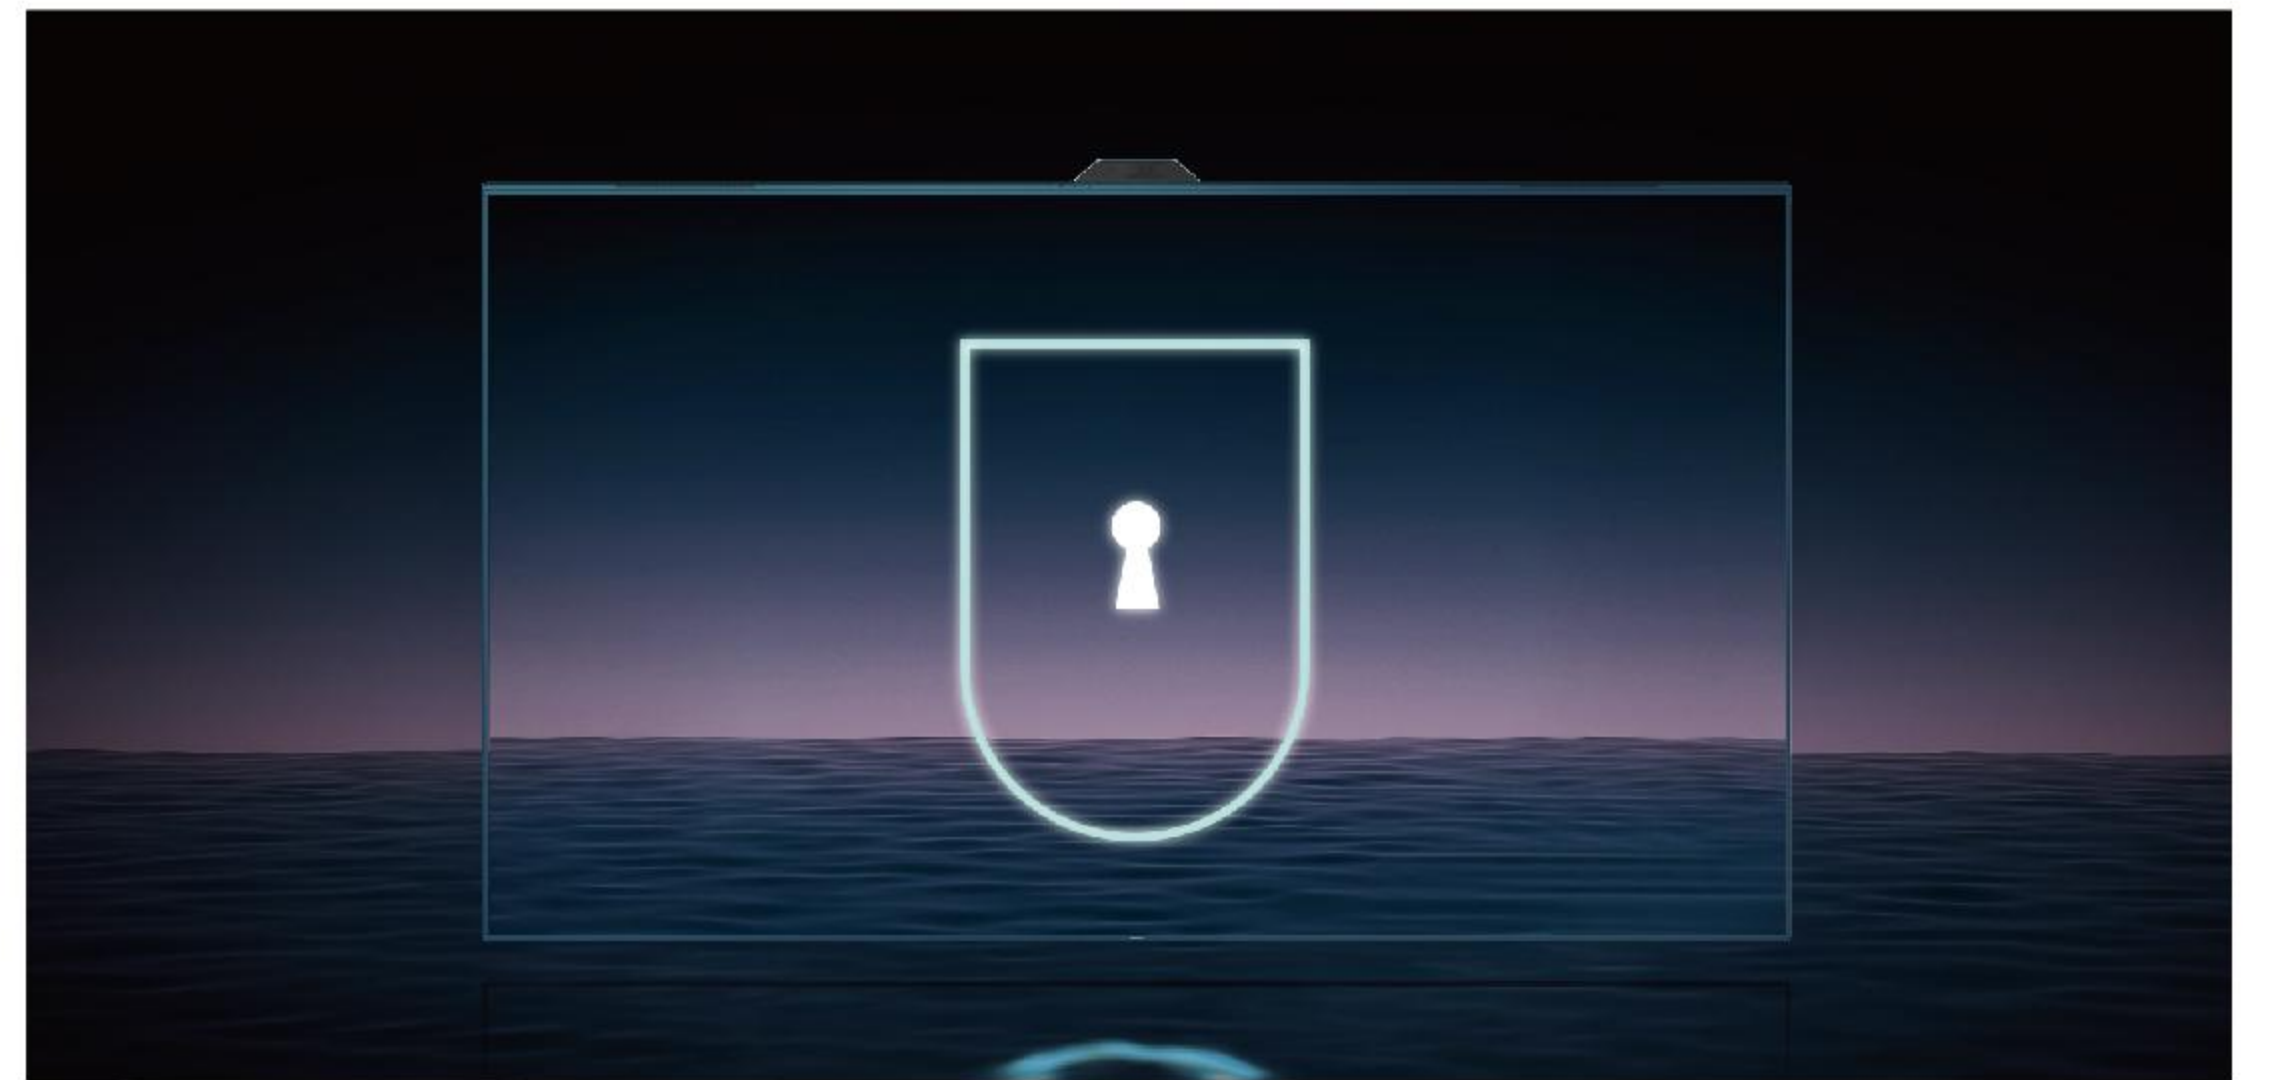

Privacy is the Priority

Engineered to perform when confidentiality is essential, our new-generation flip camera and encryption algorithms enhance the privacy of meeting attendees.

See Vividly


The 48MP + 8MP dual camera with 3x optical zoom, enhances engagement by supporting WDR, auto-framing, and speaker tracking.




WDR



Auto-Framing

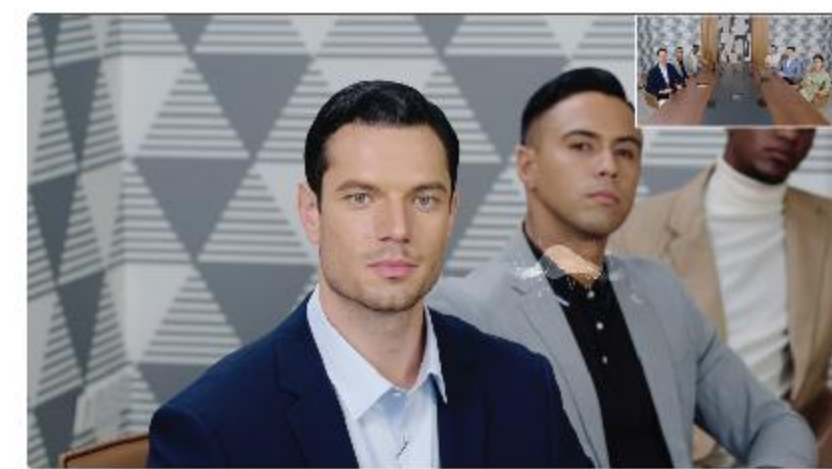

Speaker Tracking

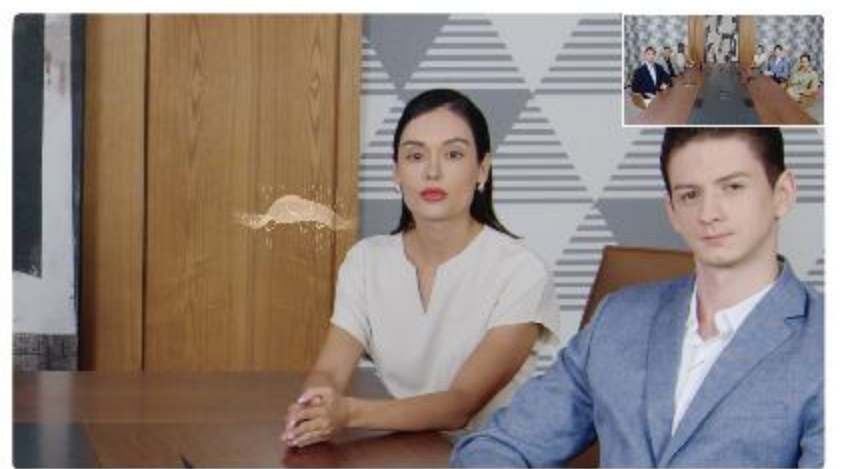

Be Heard Clearly

Equipped with 8 array microphones at 8-meter voice pickup range, the Transcend Series makes sure everyone is heard clearly.






Sound Artist

The overhead seam speaker design effectively counters obstacles to clear sound transmission, improving uniformity in large conference rooms.



Life Write

By adopting P-CAP touch technology, The V6 Transcend Series offers a true-to-life writing experience that is intuitive and precise.

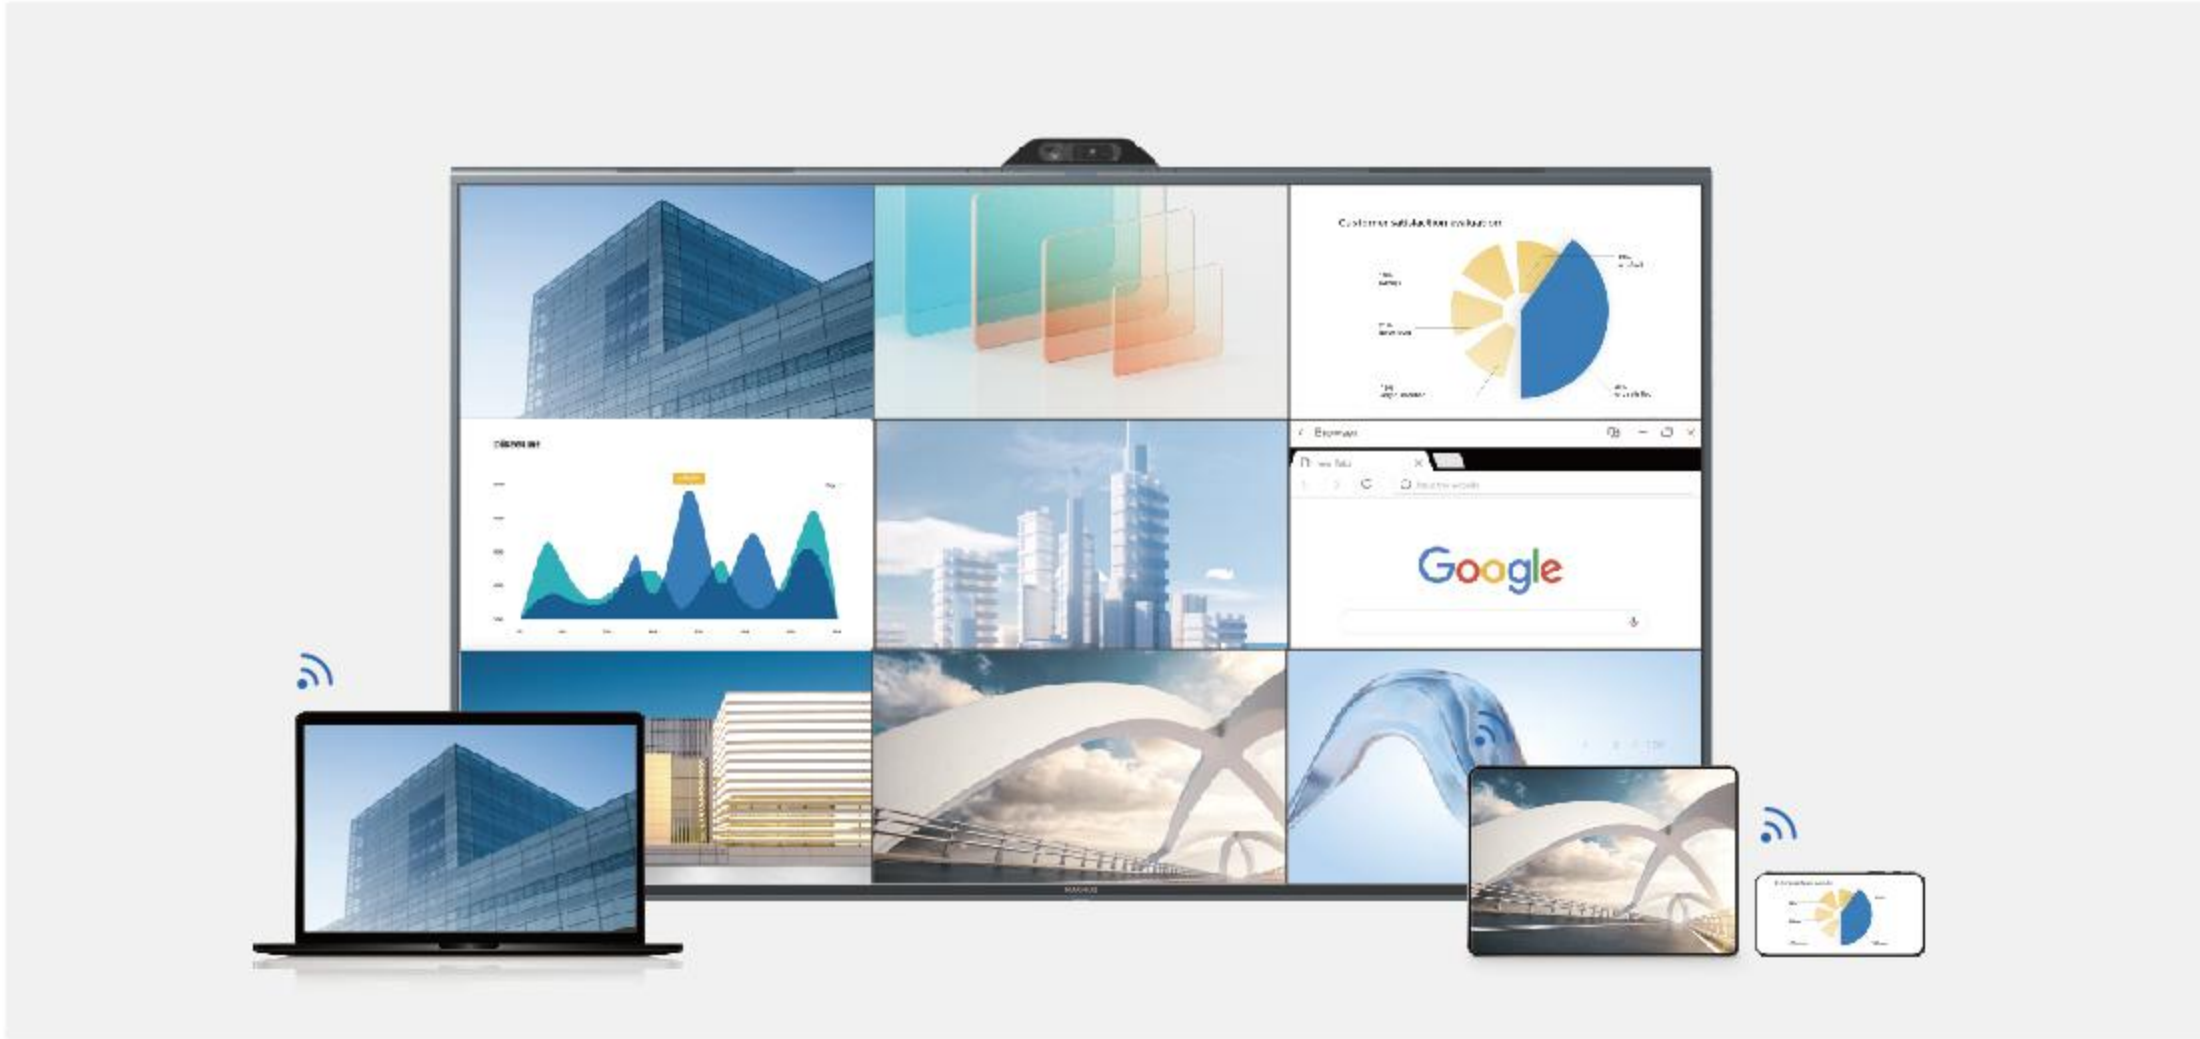

More Opportunities to Share


Expand collaborative opportunities by sharing from up to 9 devices simultaneously*; the panel's low latency preserves the 4K resolution.

*Available in Feb 2023.



BYOD Anywhere

Access the V6 Transcend Series panel's camera, microphone, and speakers directly from your own device.

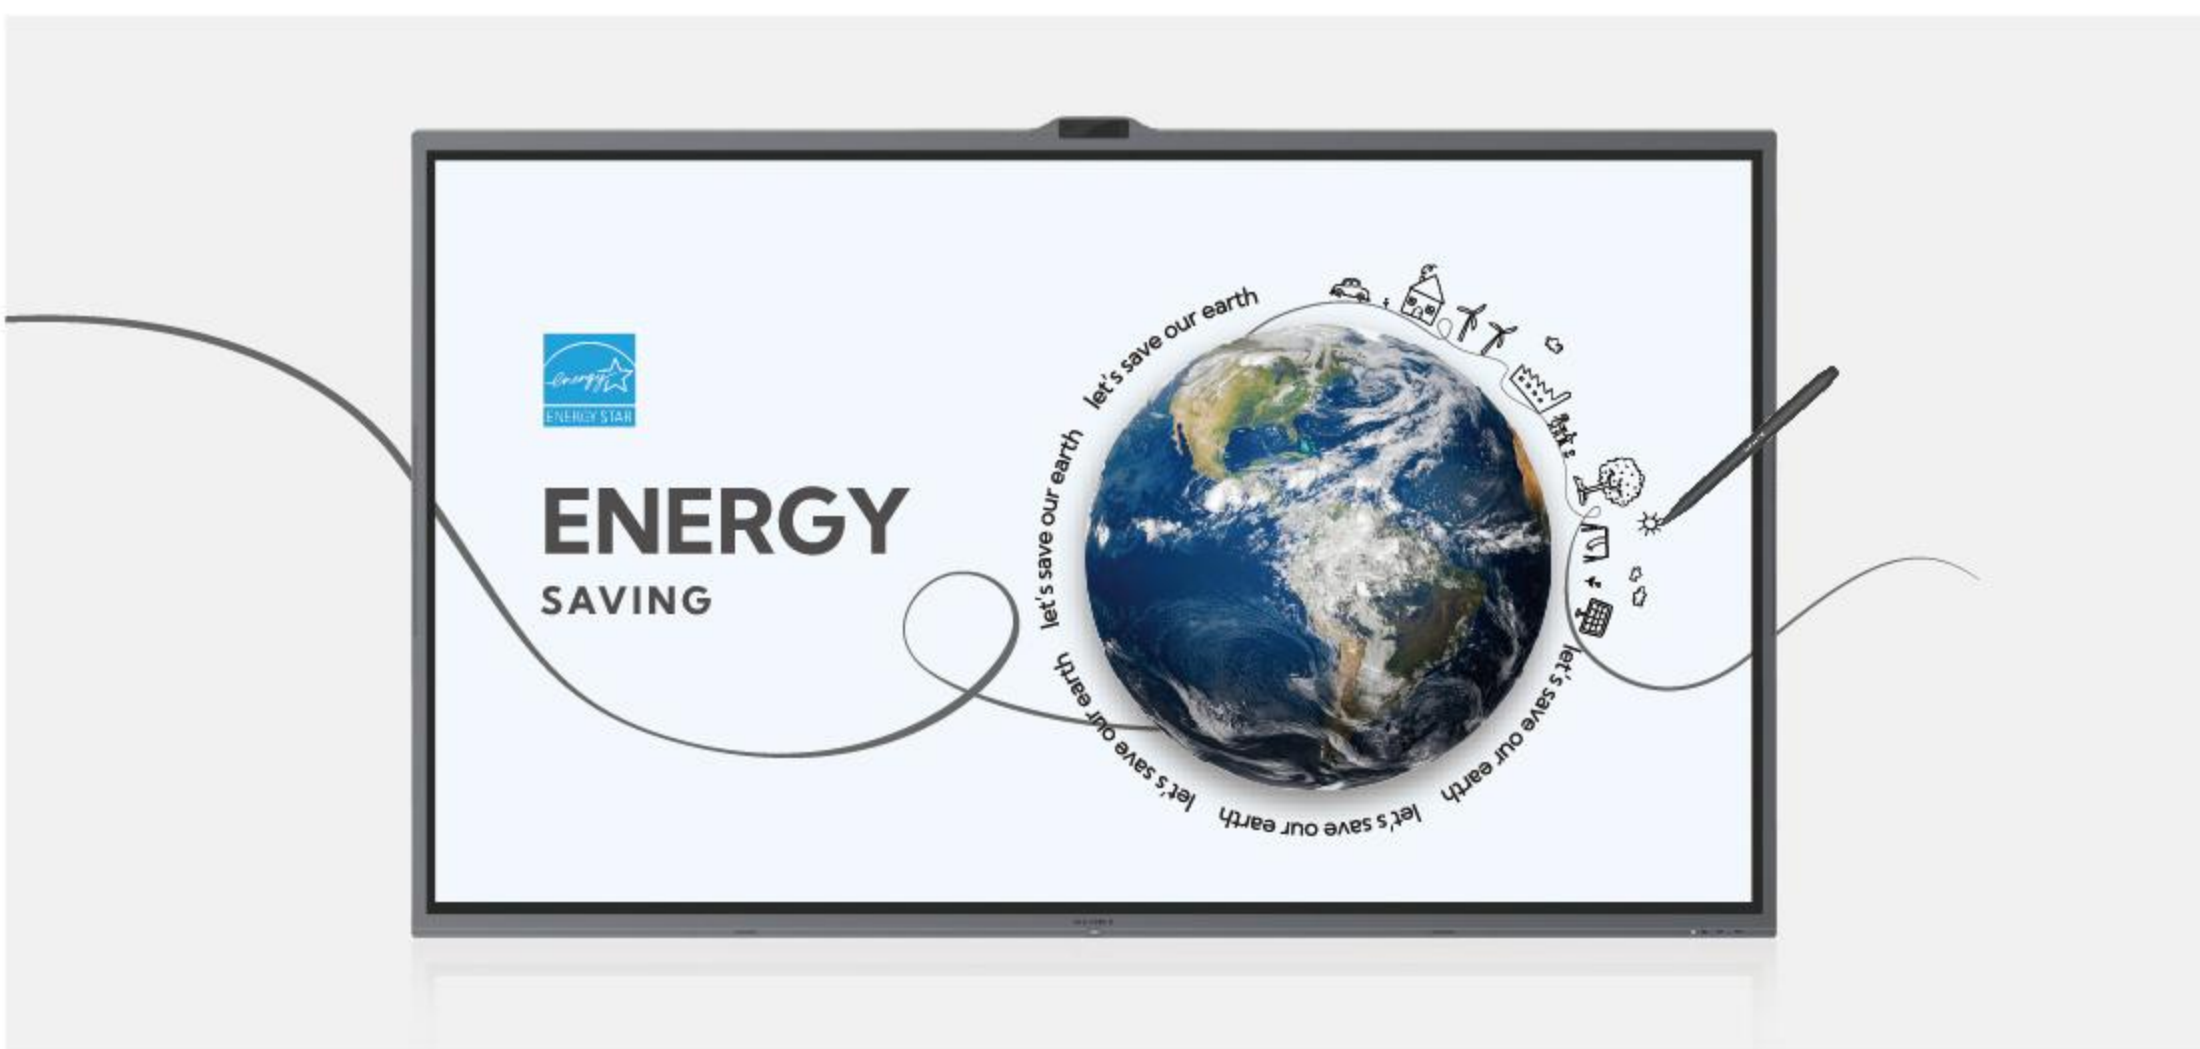

Sustainability in Design

ENERGY STAR-certified, the MAXHUB V6 Transcend Series helps you protect the environment and save costs.



Instant Device Access and Management

IT teams can easily access and manage all your MAXHUB devices instantly through the MAXHUB Pivot.

Specification

Display

Model	T6530	T8630
Diagonal Size(inch)	65	86
Resolution	3840*2160	3840*2160
Response Time	6.5ms	8ms
Brightness(typ)	350cd/m ²	350cd/m ²
Contrast Ratio	5000: 1	1200: 1
Color Gamut(typ)	90% NTSC	90% NTSC

Touch System

Touch	P-Cap Touch	P-Cap Touch
Max Touch Points Supported	20	20
Accuracy	±1.5mm	±1.5mm
Glass	Zero parallax , Anti-glare, Antibacterial	Zero parallax , Anti-glare, Antibacterial

Connectivity

Input	HDMI IN x1 , USB 2.0x1 TOUCH 2.0 x1 , USB Type-C x1	HDMI IN x1 , USB 2.0x1 TOUCH 2.0 x1 , USB Type-C x1
Audio	Audio out*1	Audio out*1
Control	RS232*1	RS232*1

Camera&Audio&Microphone

Built-in Camera	Yes , Dual Camera 48MP+8MP Flippable	Yes , Dual Camera 48MP+8MP Flippable
Camera Features	Auto frame, Speaker Tracking	Auto frame, Speaker Tracking
Built-in Speakers	2.2 channel, 10W x 2+15W x 2	2.2 channel, 10W x 2+15W x 2
Microphone Array	8 x far-field, Beam-forming mic, Max 8m range	8 x far-field, Beam-forming mic, Max 8m range

Features

Ambient Sensor	Yes	Yes
----------------	-----	-----