



# i3TOUCH PX

**Professional** capacitive touch display.

# Write naturally.


Thanks to optical bonding inside the panel and the responsive, ergonomic, pressure-sensitive pen we can achieve a highly natural and precise writing experience.

#### Control all connected devices.

Connect all the latest devices to the screen with a USB-C cable. Just one cable for audio, video, power and touch. Enjoy having access to all the tools connected to the screen, such as a webcam or mic, straight from your laptop.

#### Jot down ideas, share with everyone.

Create, capture and share your ideas or notes in the integrated whiteboard solution. Share your notes instantly via email, USB or QR code.

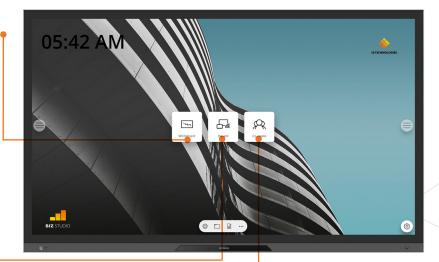

### Never run out of battery power.

Always have a fully charged pen thanks to the integrated charging station, which also serves as a convenient place to store your pen.



# Present wirelessly from any device.

No more need for additional hardware. Present your screen wirelessly from any device on the i3TOUCH. All you need is the free app.



available with

# Co-create / Learnhub

BIZ studio users can access campfire, and EDU studio users have quick access to i3Learnhub.



# Compatible with i3ALLSYNC TOUCH

The i3TOUCH PX is also compatible with our hardware transmitter that allows screen sharing without installing any software.

The ergonomic pen detects different levels

of pressure and automatically activates the

writing function in Windows ink supported

apps as Microsoft Office 365.



**4K Resolution** 

reliable image quality.

# Impress with strong craftsmanship

The ultra-slim bezel and aluminium accents along with the sturdy craftsmanship create a pleasing high-end aesthetic.

Let your content stand out with stunning

4K resolution providing accurate color and



# **Energy efficient**

The eco-friendly design comes with an extremely low power consumption, resulting in a A+ Energy label.



# Intuitive interface

Easily access your apps, change and rename input sources on the home screen, and navigate via the side menu.



RODUCT INFORMATION	/3	00	
Model name	i3TOUCH PX75	i3TOUCH PX86	
Product series	i3TOUCH PX - Interactive Flat Panel Displays		
	, ,		
DISPLAY SPECIFICATIONS			
Panel technology	In-Plane Switching Liquid Crystal Display (IPS LCD)		
Panel active screen size	75 inch	86 inch	
Display aspect ratio	16:9		
Display native resolution	3840 x 2160 pixels - 4K Ultra High Definition		
Brightness	350 cd/m²		
Contrast ratio	4000:1		
Color Gamut	85% NTSC		
Colour depth	1.073 billion colors (10 bit)		
Response time (typ.)	6 ms		
Refresh rate	60 Hz (@ UHD)		
Supported orientation	landscape		
Glass	4 mm Anti-Glare Tempered glass, optically bonded (zero airgap)		
Life time	50.000h		
viewing angle	178° / 178°		
CONNECTIVITY			
Digital audio-video inputs	3x HDMI 2.0, USB-C x 1		
Digital audio-video output			
-	1x audio jack (3.5 mm TRS connector)		
	1x audio jack (3.5 mm TRS connector)		
	1x digital coax (RCA connector)		
	USB 2.0 x 2, USB 3.0 x 2		
	OPS-PC slot (JAE TX24 connector)  1x COM DE-9 (RS-232C standard)		
Control input	LAN: RJ-45 in xl, RJ-45 out xl		
Network	Wi-Fi: 2.4 / 5 GHz (IEEE 802.11 a/b/g/n/ac)		
Integrated loudspeakers	· • • • • • • • • • • • • • • • • • • •		
Charge station for stylus			
	integrated		
OPERATIONAL FEATURES			
Operating System	Android™ 8.0		
	CPU: A73 x 2 + A53 x 2		
Architecture	GPU: MaliG51 x 4		
71101110010110	RAM: 3GB		
	ROM: 32GB		
	Projected Capacitive Touch recognition		
	Input Detection: 20 touch inputs   Multiple writing: max. 5		
Interactive touch	Touch Connection: 1x USB-B 3.0		
	Recognition: Finger (size $\geq$ 10 mm) or capacitive stylus (3.0 $\pm$ 0.1 mm)		
	Response time: < 10 ms		
	Accuracy: ± 1 mm		
	Active stylus (Microsoft Ink / Windows Ink compatible)		
	Windows, Android, MacOS X, Linux, Chrome OS		
Supported Compatibility	Windows, Android, MacOS X, Linux, Chrome OS		
Supported Compatibility  Maximum operating hours			

i3	SNOTES	Whiteboarding	application
ELECTRICAL PROPER	TIES		

Power voltage	100 ~ 240 Volt - 50/60 Hz	
Power consumption (standby)	0.5W	0.5W
Power consumption (operation)	180W	235W

Extra energy saving features Ambient Light Sensor & motion sensor

#### **ENVIRONMENTAL CONDITIONS**

Operating temperature	0° C to 40° C
Operating humidity	10% to 90% RH non-condensing
Storage temperature	-20° C to 40° C
Storage humidity	10% to 90% RH pop-condensing

#### PHYSICAL PROPERTIES

Product dimensions	1730 x 1047 x 75 mm	1976 x 1187 x 75 mm	
Packaging Size (L x H x W)	1859 x 1136 x 247 mm	2119 x 1281 x 275 mm	
Mounting Pattern	Vesa 400 x 800 mm	Vesa 400 x 800 mm	
Weight Net (lb/kg)	62 kg	75 kg	
Weight Gross (lb/kg)	82 kg	98.5 kg	
C-1	Plank front borol blank bank onbinot		

Color Black front bezel, black back cabinet

#### WARRANTY

Standard Warranty Standard Warranty 3 years (Can be extended to 5 or 7 years.)

#### **ACCESSORIES**

Included Power cord (2m) x 1, Active stylus x 1, Remote control x 1, AAA battery (for remote control), Wall mount

i3FLOORSTAND series - Display stands and floorlifts

Optional i3COMPUTER OPS - Integration Computers

i3ALLSYNC HDMI Transmitter (vsv0005930)

#### **REGULATORY INFORMATION**

Product Type Approval CE, FCC

#### **i3ALLSYNC REQUIREMENTS**

	Client laptop and mobile device requirements		
	Laptops & Tablet PCs	iPads, iPhones & iPods	Android Tablets & Phones
Operating System	Windows 10 or newer OSX 10.10 or newer	iOS version 8.0 or newer	Android 6.0 or newer
Minimum Required	Intel Core 2Duo , 2.3Ghz, 2GB RAM, Equivalent specification to AMD's CPU	iPad 3 / iPhone 5 or newer	Phones/Tablets with Android 6.0 or newer

# NETWORK REQUIREMENTS


Network and Internet Access

When i3ALLSYNC is deployed into the existing network, the host (receiver) and the clients require wired or wireless network connection with a minimum bandwidth of 20 Mbps. When running HD content, increase the minimum bandwidth to 50 Mbps. Like any network application, the overall performance is dependent on available bandwidth. Internet access is also required to update the i3ALLSYNC receiver app.

# **FUNCTIONALITY**

- Screen mirroring from any device (with minimum requirements)
- FHD resolution
- Wireless touch function on Windows & MAC OS.

- Support up to 6 split-screen mirroring
- Support AirPlay, and Google Cast
- i3ALLSYNC app available in the Apple store, Play store and on i3-allsync.com.
- ${\it i3ANNOTATE}$  on all images and save your content in  ${\it i3NOTES}$  Whiteboard

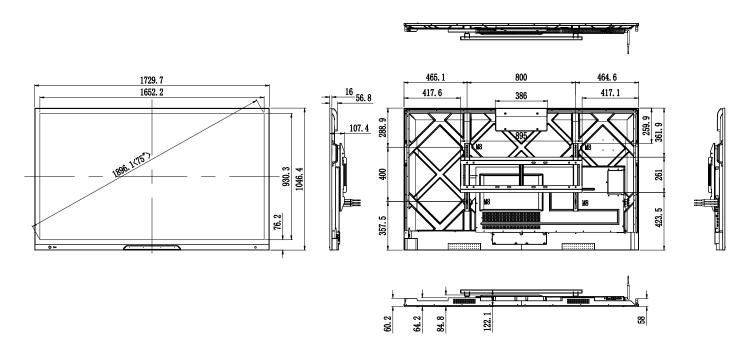

86"

